




DESCRIPTION

ROTLEDS[®] are illuminated signs with translucent photoluminescent fronts. The Rotleds 15° model is designed for the correct and effective evacuation in tunnels.

TECHNICAL CHARACTERISTICS

- ⇒ Power: 100-230 VAC 50/60 Hz
- ⇒ Consumption: 35 W approx.
- ⇒ IP67 waterproof and IK08 impact resistance
- ⇒ LEDs life: 50,000 hours.
- ⇒ Dimensions: 1034x535 mm
- ⇒ Weight: 10/12 kg. approx.
- ⇒ LEDs type SMD5050.
- ⇒ Materials: aluminum painted in gloss grey.
- ⇒ Translucent photoluminescent fronts according to UNE 23035 class "A" and anti-graffiti vinyl.
- ⇒ Quick connectors (2x1'5mm²).

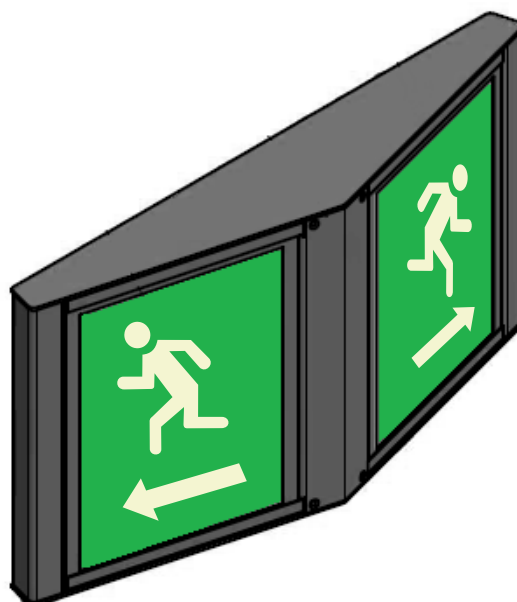

CERTIFICATES

- IP67 and IK08.

INSTALLATION AND ACCESSORIES

- The connection is simple thanks to the quick connector.
- The structure is frontally screwed into the wall with 6 holes. The two panels are slid on both sides until they stop (from the center to the sides). Connections stay towards the center with interior room for manipulation so we can make the connections. The front cover is screwed with 4 holes that act as a stop and close.